



Hanging textile
SANDSTORM II

almedahls

SANDSTORM II

A small pencil pattern in a large context.

Almost uni- coloured yet unique, in finely tuned colour combinations, Sandstorm truly wears the Almedahls trademark. The design expression, created by Studio Amanda & Matilda has been a success from the start.

The pattern origins from a small pencil drawing that was abstracted through digitization and enlargement. Looking at the pattern you can feel the movement of the hand, experiencing a true sense of craftsmanship. The small dots flow organically across the surface making an impression of being swirling in the wind. The light textural design makes Sandstorm fit into different types of environments creating a calm and welcoming atmosphere.


SANDSTORM II offers plenty of see-through with an openness factor of 18%. Surprisingly, the fabric also provides a combined solar reflection and absorption value of 55 which makes SANDSTORM II meaningful in a daylight control context.

In terms of sustainability, the fiber is 100% recycled polyester; and is both Five-Zero-Green- and Ökotex certified. As you would expect, SANDSTORM II has sound absorbent properties with a weighted alfa value of 0.15 and is part of our Hygiene Concept for application in hygiene sensitive spaces.



**SANDSTORM
NOW COMES IN
A NEW LIGHT AND
AIRY QUALITY
WITH A DELICATE
TRANSPARENCY.**



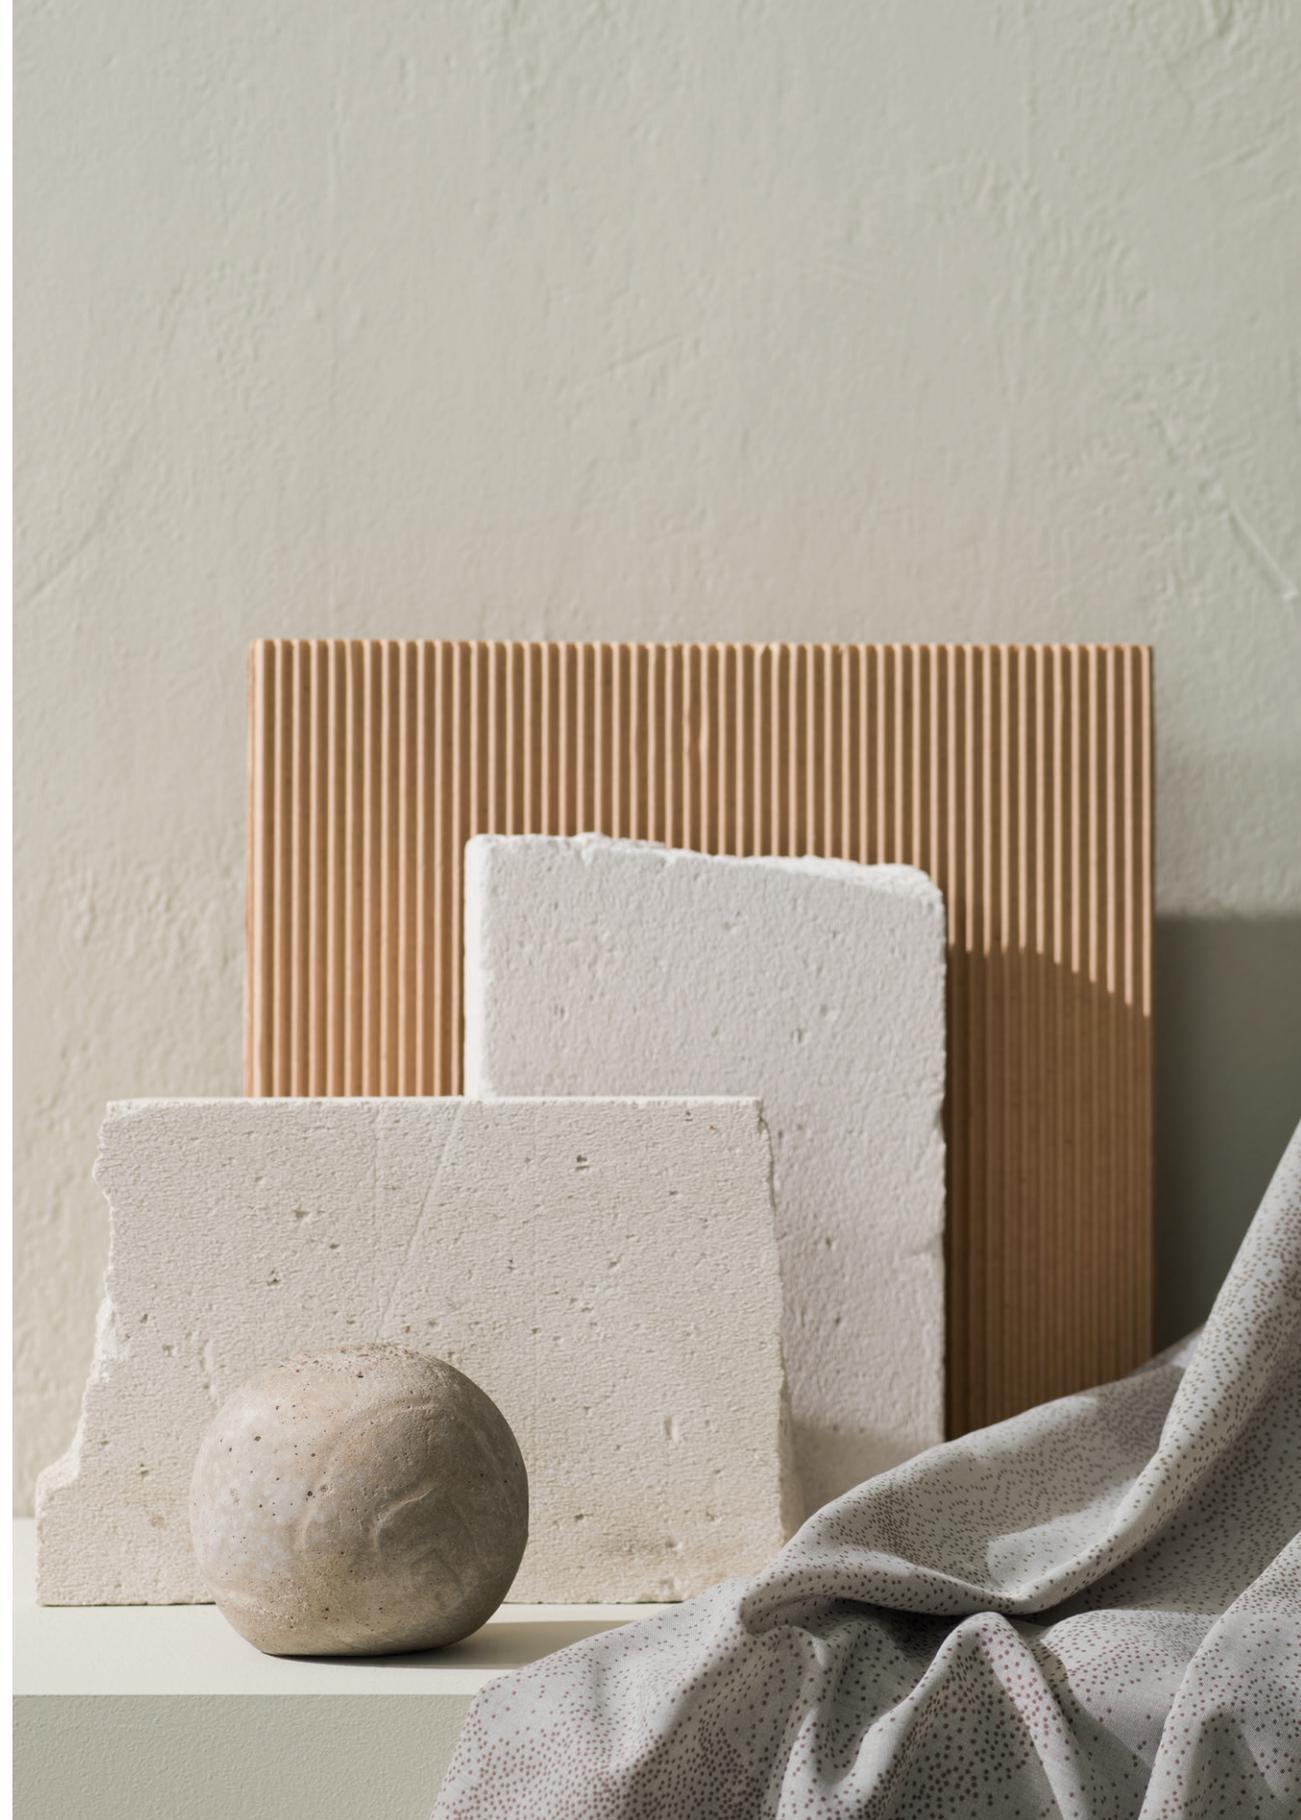



**IT HAS SOFT DRAPE
AND A SMOOTH HANDLE
COMPLEMENTING
THE EXPRESSION OF
THE PATTERN.**



**THE FABRIC IS, AS THE
PREVIOUS VERSION,
MADE OF 100%
RECYCLED POLYESTER,
AND 200 CM WIDE.**



SANDSTORM II

Inspired by life by the shoreline, the updated colour range has a softer, subdued expression. It is natural, subtle, but still with a strong identity. The new colour additions are dusty, warm and earthy complementing the most popular greys, beige, and greens from the previous version of Sandstorm.

Design	Studio Amanda & Matilda
Material	100% Recycled Polyester FR
Light transmission	Transparent
Openness factor	18%
Turnable design	Yes
Width	200 cm, 78,8 inch
Weight	90 g/m2, 2,65 oz/yd2
Fire resistance standard	DIN4102-B1
Sound Class SS-EN ISO 354	E
Alfa value	0,15
Sustainability profile	Oeko-tex Five Zero Green Recycled fiber SS-EN ISO 14001:2004



Almedahls AB

Lyddevägen 8
SE-51123 Kinna, Sweden
Tel +46 (0)320 79 40 00

info@almedahls.se
www.almedahls.se